

DUPLICATOR

Ultra-Simple Vocal Effects Stompbox with
Doubling, Reverb and Pitch Correction

User Manual



EN

EN Important Safety Instructions



Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock.

Use only high-quality professional speaker cables with ¼" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure - voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.



Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.



Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.



Caution

These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

11. Use only attachments/accessories specified by the manufacturer.



12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid

injury from tip-over.

13. Unplug this apparatus during lightning storms or when unused for long periods of time.

14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.

16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.



17. Correct disposal of this product: This symbol indicates that this product must not be disposed of with household waste, according to the WEEE Directive (2012/19/EU) and your national law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.

18. Do not install in a confined space, such as a book case or similar unit.

19. Do not place naked flame sources, such as lighted candles, on the apparatus.

20. Please keep the environmental aspects of battery disposal in mind. Batteries must be disposed-of at a battery collection point.

21. Use this apparatus in tropical and/or moderate climates.


LEGAL DISCLAIMER

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2016 All rights reserved.

LIMITED WARRANTY


For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at music-group.com/warranty.

1. Controls

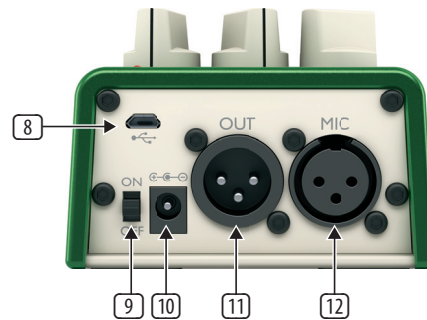

- 1 **DOUBLING** knob selects the type and amount of doubling effect on your voice. The first two types allow a tight voicing that has less variation from your original voice, or loose doubling that varies more in pitch and time. The 3rd type adds an extra voice an octave below your original note. Adjust the knob within your preferred effect type to determine the volume of the second voice.
- 2 **REVERB** knob selects the type and amount of reverb effect on your voice. The 3 types of reverb appear in order from the smallest space (Room) to the largest (Hall). Adjusting the knob within your preferred reverb space determines how pronounced the effect will be. Turning the knob fully counterclockwise turns the reverb off.
- 3 **CORRECTION** knob adjusts the amount of pitch correction. With the knob at the center 12:00 position, the effect will provide subtle pitch support without noticeable or unnatural artifacts. Turn the knob all the way up for a more aggressive effect, or fully counterclockwise to turn the effect off.
- 4 **BATTERY LED** indicates the battery level, with green showing full life, yellow being partial life, and red to alert that the batteries should be changed.
- 5 **TONE** button engages a preset combination of adaptive EQ, compression, de-essing, and noise gate. "Normal" and "Less Bright" settings can be toggled by holding the Tone button and pressing the footswitch.
- 6 **ON/OFF LED** lights when the effect is engaged.
- 7 **FOOTSWITCH** bypasses the doubling effect, but does not affect the reverb, correction or Tone status.
- 8 **USB** input accepts a micro USB cable for connection to a computer. Use the VoiceSupport application to install firmware updates, and for other features depending on your product. Download VoiceSupport from tc-helicon.com/products/voicesupport/
- 9 **ON/OFF** switch powers the pedal on and off.
- 10 **POWER** input accepts a 9V power cable (not included).
- 11 **OUT** jack accepts a balanced XLR cable for connection to a mixer or active speaker.
- 12 **MIC** input jack accepts a balanced XLR cable to connect your microphone.

EN 2. Operation

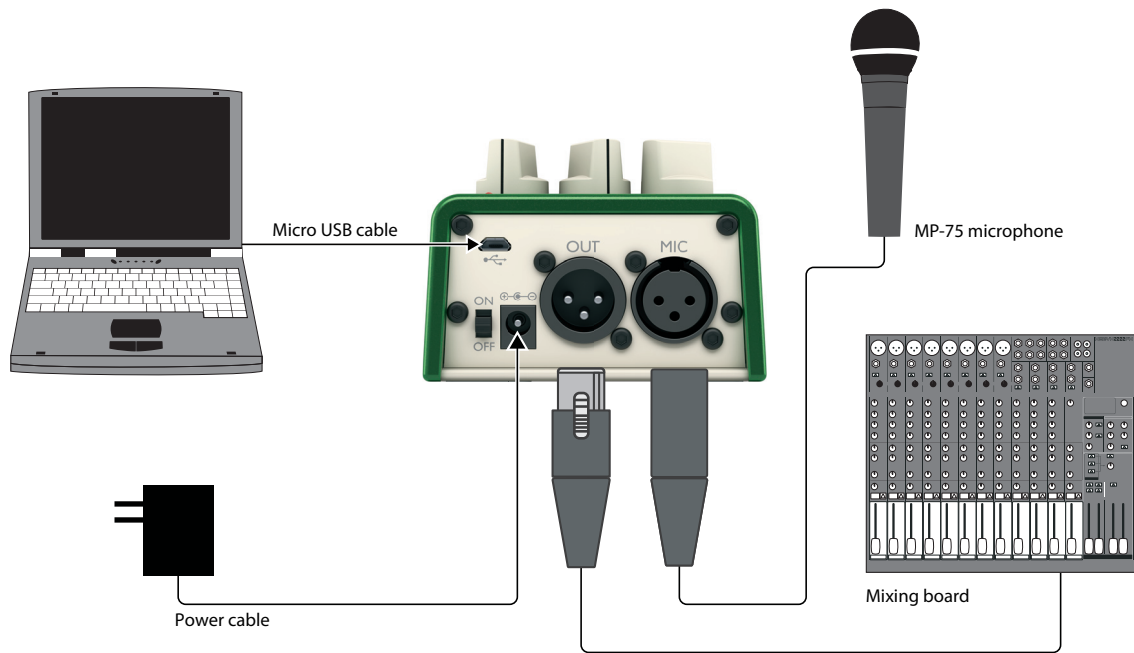

Connection

- Connect a microphone to the MIC jack
- Connect the OUT jack to a mixer, interface or active speaker
- Connect power cable (optional)
- Connect a micro USB cable to a computer (optional)

Momentary Mode

The standard function of the footswitch is a latching style, meaning that each press of the footswitch turns the doubling effect on and off. Alternatively, the switch can operate in momentary mode, meaning that the doubling is only active while the footswitch is held down. As soon as you release the footswitch, the doubling effect is bypassed.

To switch the unit to momentary mode, hold the Tone button down while powering the unit on. Repeat the process to return to latching mode.

Changing the Batteries

Duplicator can operate on 4 AA batteries. Remove the single screw on the bottom of the pedal to open the battery door. Make sure to observe correct polarity when inserting the batteries.

Auto Gain

Duplicator will automatically adjust the gain setting for your microphone, eliminating the need for manual adjustments and ensuring that a good signal is passed to the mixer without any unwanted distortion.

24V Phantom Power

Phantom power is always active on the Duplicator. This will power condenser microphones, but will not affect dynamic mics either.

Mic Control

Mic Control allows you to control the effect's on/off status via an MP-75 microphone. Press and hold the footswitch while powering up the unit to toggle Mic Control.

Note that when using a condenser microphone, Mic Control should be disabled to prevent unwanted on/off switching.

3. Specifications

Input Mic

Input Impedance: Balanced: 2.68 kOhm

Mic Input Level @ 0 dBFS: -42 dBu to +1 dBu

EIN @ Max Mic Gain Rg = 150 Ohm: -126 dBu

Mic input SNR: >104 dB

Output

Output Impedance, Bal./Unbal.: 200/100 Ohm

Output Full Scale: +1 dBu

Dynamic Range: >104 dB, 20 Hz to 20 kHz

Frequency Response: +0/-0.3 dB, 20 Hz to 20 kHz

Power

Power Supply (Optional): 9 V / 670 mA

Power Consumption: 6 W

Requirements

Operating Temperature: 32°F to 122°F (0°C to 50°C)

Storage Temperature: -22°F to 167°F (-30°C to 70°C)

Humidity Max.: 90 % non-condensing

Size & Weight

Dimensions: 5.4" x 3.5" x 2.3" (140 x 90 x 60 mm) Weight: 0.92 lb. (420 g)

Warranty

For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at music-group.com/warranty.

Due to continuous development, these specifications are subject to change without notice

